



MODULAR OFFICES & ENCLOSURES • PARTITIONS • BOOTHS • MEZZANINES


Wiring Posts: Wiring posts are either 20ga or 16ga painted steel or 6063T-5 aluminum extrusions with a satin anodized finish. In addition to supporting the structure, all posts act as wiring chases and have friction fit (steel posts) or snap in (aluminum) cover plates to allow easy access for electrical and telecommunications wiring. The non-progressive post design allows panels to be replaced or rearranged without impacting adjacent panels or ceiling.

Panels: Panels are either 1-3/4" or 3" thick and available with vinyl covered 1/8" hardboard or 1/2" gypsum with polystyrene cores. Other surfaces available include painted gypsum, FRP, 24ga Steel, and cement board. Custom Colors are available in most surfaces, consult the factory.

Roof Deck and Ceiling: Roof deck is painted 22ga corrugated B-deck. Ceiling is acoustical grid type, including white metal grid, hangar wire, and 5/8" thick 2x4 lay-in fiber board tiles.

Doors and Windows: Standard doors are pre-hung 3070 (3' wide x 7' tall) x 1-3/4" thick. Hardware includes hinges, sweep, and a key-in-knob locket. Window are 1/4" thick tempered safety glass preinstalled in anodized aluminum frames. Standard glass dimensions are 37" tall by full panel width.

Electrical: Lights are 160Watt 2x4 lay-in T-8 fixtures with an acrylic lens. Single pole and 3-way switches as well as duplex outlets are provided in accordance with a standard layout. Circuit breaker panels consist of 125A panels with 70A main breakers. Individual breakers are 15A. Electrical wiring, conduit, and light bulbs are furnished by others.

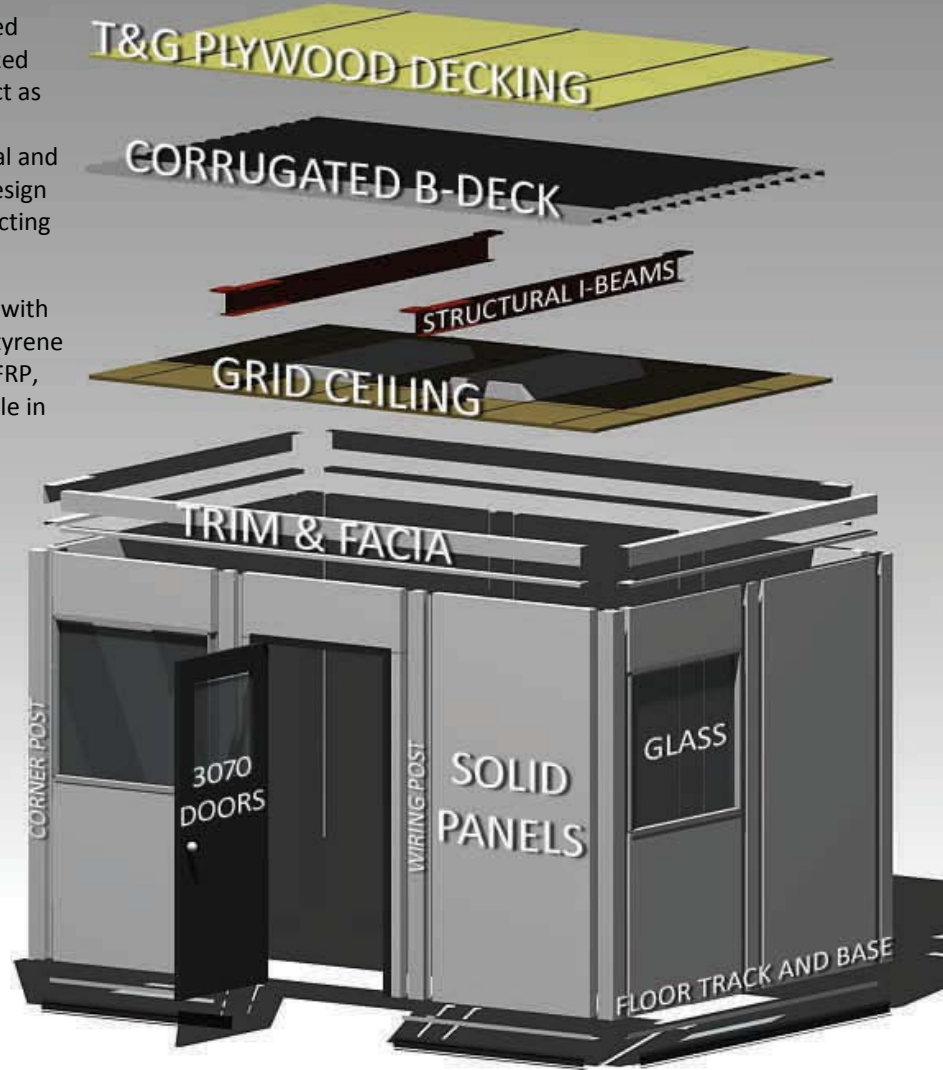

Many custom options and accessories are available. Consult the factory for pricing and availability

